Gigaset

SL930A

Glückwunsch!

Mit dem Kauf eines Gigasets haben Sie sich für eine Marke entschieden, die auch bei der Verpackung auf Umweltfreundlichkeit achtet.

Weitere Informationen erhalten Sie unter www.gigaset.com.

GIGASET. INSPIRING CONVERSATION.
MADE IN GERMANY

Übersicht Gigaset SL930A

Mobilteil

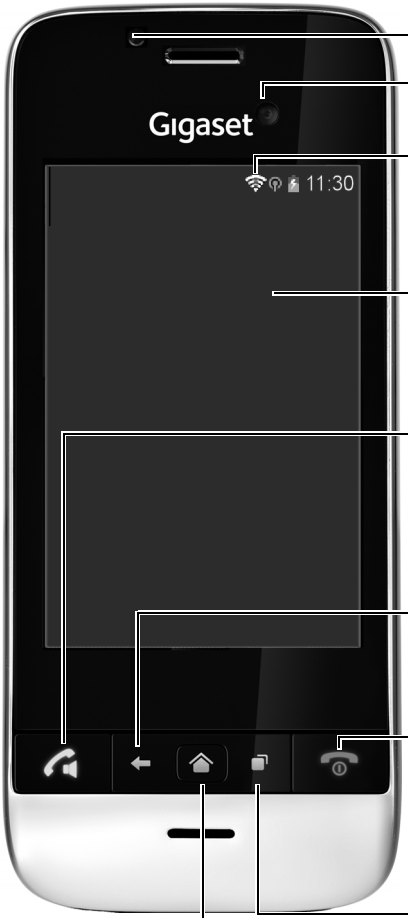

Nachrichten-LED (→ S. 2)

Annäherungssensor (→ S. 19)

Touchscreen/Display

Statusleiste

Symbole zeigen den Betriebszustand und die aktuellen Einstellungen des Telefons an.
Statusseite: Statusleiste berühren und nach unten ziehen (→ S. 17).

Anwendungsbereich

Abhängig von gewählter App (Anwendung).

Startseiten: Individuell gestaltbar (→ S. 15).

Tasten

Abheben-Taste

- Angezeigte Nummer wählen, Gespräch annehmen, zwischen Hörer- und Freisprechbetrieb wechseln, Anrufliste öffnen (**kurz** drücken).
- Lautstärke einstellen (**lang** drücken).

Zurück-Taste

- Zurück zur vorherigen Seite.
- Tastenfeld, Dialogfeld, Menü oder Meldungsfenster schließen.

Auflegen-/Ende-Taste

- Gespräch/Paging-Ruf beenden, internen Anruf abweisen, Klingelton abstellen bei externem Anruf, Display ausschalten (**kurz** drücken).
- Mobilteil ein-/ausschalten (**lang** drücken).

Zuletzt-Taste / Menü-Taste

- Zuletzt geöffnete Apps anzeigen (**kurz** drücken).
- App-Verwaltung (auf Startseite **lang** drücken)
- App-spezifisches Menü öffnen (**lang** drücken).

Startseiten-Taste

- Startseite anzeigen.

Nachrichten-LED

Nachrichten-LED

Blinkt bei verschiedenen Ereignissen. Signalisiert z. B.:

- Entgangene Anrufe
- Neue Nachrichten auf dem Anrufbeantworter

Ausführliche Informationen zu den signalisierten Ereignissen werden auf der Statusseite angezeigt (→ S. 17).

Anschlüsse

Lade-Kontakte

Micro-USB-Anschlussbuchse

Mobilteil mit Computer verbinden.

3,5 mm-Klinkenbuchse

Kopfhörer/Headset anschließen, Stereobetrieb und Mikrofon-Funktion möglich.

Basis

Anmelde-/Paging-Taste

- Mobilteil suchen (Paging) (**kurz** drücken)
- Basis in Anmeldemodus versetzen (**lang** drücken)

Display-Seiten

Die hier gezeigten Abbildungen sind Beispiele.

Startseiten 1-5 (➔ S. 15)

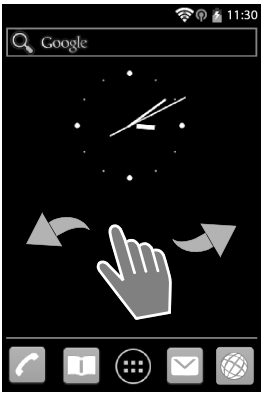

Statusseite (➔ S. 17)

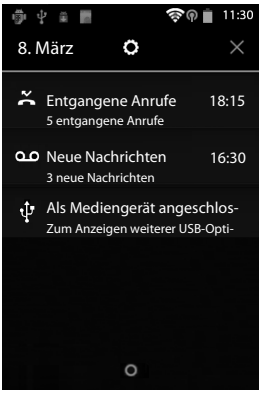

Wählseite (➔ S. 20)

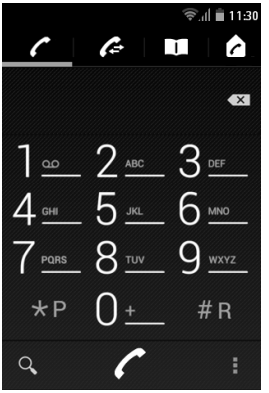

Anwendungsseiten (➔ S. 18)

Apps

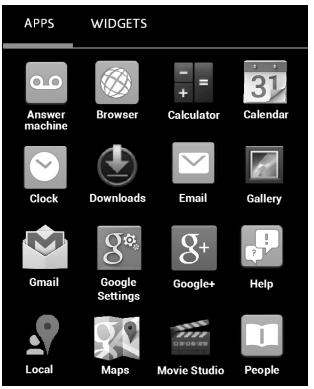

Widgets

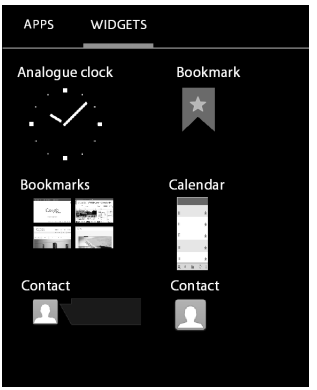

Sicherheitshinweise

	Lesen Sie vor Gebrauch die Sicherheitshinweise und die Bedienungsanleitung. Klären Sie Ihre Kinder über deren Inhalt und über die Gefahren bei der Benutzung des Geräts auf.

	Verwenden Sie nur das auf den Geräten angegebene Steckernetzgerät.
	Legen Sie nur **aufladbare Akkus** ein, die der **Spezifikation** entsprechen (siehe „Technische Daten"), da sonst erhebliche Gesundheits- und Personenschäden nicht auszuschließen sind. Akkus, die erkennbar beschädigt sind, müssen ausgetauscht werden.
	Medizinische Geräte können in ihrer Funktion beeinflusst werden. Beachten Sie die technischen Bedingungen des jeweiligen Umfeldes, z. B. Arztpraxis. Falls Sie medizinische Geräte (z. B. einen Herzschrittmacher) verwenden, informieren Sie sich bitte beim Hersteller des Gerätes. Dort kann man Ihnen Auskunft geben, inwieweit die entsprechenden Geräte immun gegen externe hochfrequente Energien sind (für Informationen zu Ihrem Gigaset-Produkt siehe „Technische Daten").
	Halten Sie das Mobilteil nicht mit der Geräterückseite an das Ohr, wenn es klingelt bzw. wenn Sie die Freisprechfunktion eingeschaltet haben. Sie können sich sonst schwerwiegende, dauerhafte Gehörschäden zuziehen. Ihr Gigaset verträgt sich mit den meisten am Markt befindlichen digitalen Hörgeräten. Eine einwandfreie Funktion mit jedem Hörgerät kann jedoch nicht garantiert werden. Das Telefon kann in analogen Hörgeräten Störgeräusche (Brummton oder Pfeifton) verursachen oder diese übersteuern. Kontaktieren Sie bei Problemen den Hörgeräteakustiker.
	Die Geräte sind nicht spritzwassergeschützt. Stellen Sie sie deshalb nicht in Feuchträumen wie z. B. Bädern oder Duschräumen auf.
	Nutzen Sie die Geräte nicht in explosionsgefährdeten Umgebungen, z. B. Lackierereien.
	Geben Sie Ihr Gigaset nur mit der Bedienungsanleitung an Dritte weiter.
	Bitte nehmen Sie defekte Geräte außer Betrieb oder lassen diese vom Service reparieren, da diese ggf. andere Funkdienste stören könnten.

	Verwenden Sie das Gerät nicht, wenn das Display gesprungen oder zerbrochen ist. Zerbrochenes Glas oder Kunststoff kann Verletzungen an Händen und Gesicht verursachen. Lassen Sie das Gerät vom Service reparieren.
	Um einen Verlust des Hörsinns zu verhindern, vermeiden Sie das Hören bei hoher Lautstärke über lange Zeiträume.

	◆ Das Gerät lässt sich während eines Stromausfalls nicht betreiben. Es kann auch **kein Notruf** abgesetzt werden. ◆ Bei eingeschalteter Tastensperre können auch Notrufnummern **nicht** gewählt werden.

Inbetriebnahme

Verpackungsinhalt überprüfen

- eine Basis,
- eine Abdeckung für die Basisrückseite,
- ein Steckernetzgerät für die Basis,
- ein Telefonkabel,
- ein Mobilteil,
- ein Akku,
- ein Akkudeckel (hintere Abdeckung des Mobilteils),
- eine Ladeschale,
- ein Steckernetzgerät für die Ladeschale,
- eine Bedienungsanleitung.

Um Internetdienste an Ihrem Telefon zu nutzen, benötigen Sie einen betriebsbereiten Router mit WLAN-Funktion und Internetverbindung, an dem Sie Ihr Mobilteil als WLAN-Client registrieren.

Basis und Ladeschale aufstellen

Basis und Ladeschale sind für den Betrieb in geschlossenen, trockenen Räumen mit einem Temperaturbereich von +5 °C bis +45 °C ausgelegt.

▶ Stellen Sie die Basis an einer zentralen Stelle der Wohnung oder des Hauses auf eine ebene, rutschfeste Unterlage oder befestigen Sie die Basis an der Wand.

- Reichweite für Telefonbetrieb:
  Achten Sie auf die DECT-Reichweite der Basis. Diese beträgt in Gebäuden bis zu 50 m, im freien Gelände bis zu 300 m. Die Reichweite verringert sich, wenn **Maximale Reichweite** ausgeschaltet ist.
  ▶ Anwendungsseite ▶ **Einstellungen** ▶ **DECT**.
- Reichweite für Datenverbindungen:
  Die WLAN-Reichweite des Routers ist normalerweise geringer als die Reichweite der Basis. Beachten Sie dazu die Bedienungsanleitung für Ihren Router.
- Setzen Sie das Telefon nie den Einflüssen von Wärmequellen, von direkter Sonneneinstrahlung und von anderen elektrischen Geräten aus.
- Schützen Sie Ihr Telefon vor Nässe, Staub, aggressiven Flüssigkeiten und Dämpfen.

Basis mit Telefon- und Stromnetz verbinden

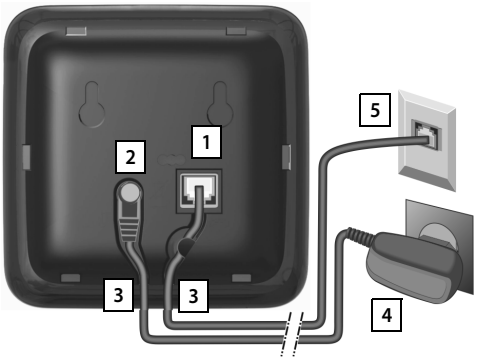



- Das Telefonkabel in die rechte/untere Anschlussbuchse 1 auf der Basis-Rückseite stecken, bis es einrastet.
- Das Stromkabel des Steckernetzgeräts in die Anschlussbuchse 2 stecken.
- Beide Kabel in die dafür vorgesehenen Kabelkanäle 3 legen.
- Abdeckung in die Aussparungen der Basisrückseite einklicken 3a (nicht bei Wandmontage).
- Zuerst das Steckernetzgerät 4 und danach den Telefonstecker 5 anschließen.

- Das Steckernetzgerät muss **immer eingesteckt** sein, weil das Telefon ohne Stromversorgung nicht funktioniert.
- Verwenden Sie nur das **mitgelieferte** Steckernetzgerät und Telefonkabel. Die Steckerbelegung von Telefonkabeln kann unterschiedlich sein.

Ladeschale anschließen

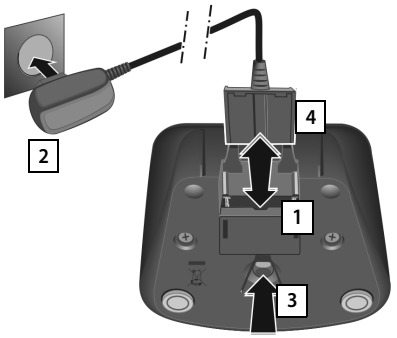

- Flachstecker des Steckernetzteiles anschließen 1.
- Steckernetzteil in die Steckdose stecken 2.

Falls Sie den Stecker von der Ladeschale wieder abziehen müssen:

- Zuerst Steckernetzteil vom Stromnetz trennen.
- Danach Entriegelungsknopf 3 drücken und Stecker abziehen 4.

Mobilteil in Betrieb nehmen

Display und Tasten des Mobilteils sind durch eine Folie geschützt. **Bitte Schutzfolie abziehen!**

⚠	Bitte benutzen Sie zur Bedienung des Mobilteils **keine** Touchscreen-Stifte! Verwenden Sie keine Schutzhüllen/-folien anderer Hersteller. Das kann die Bedienbarkeit Ihres Mobilteils einschränken.

SD-Karte einstecken (nicht im Lieferumfang enthalten)

Zum Speichern persönlicher Daten, Bilder, Videos oder Musik können Sie eine Micro SD-Karte in Ihr Mobilteil einlegen.



- Fingernagel in den Schlitz am Karteneinschub stecken und Karteneinschub nach vorn ziehen 1.



- Karteneinschub nach oben klappen 2.
- Karte einschieben 3.



- Karteneinschub nach unten klappen 4 und nach hinten schieben, bis er einrastet 5.

Akku einlegen

⚠	Nur den von Gigaset Communications GmbH empfohlenen aufladbaren Akku verwenden, da sonst erhebliche Gesundheits- und Sachschäden nicht auszuschließen sind. Es könnte z. B. der Mantel des Akkus zerstört werden oder der Akku könnte explodieren. Außerdem könnten Funktionsstörungen oder Beschädigungen des Gerätes auftreten.



- Akku zuerst mit der Kontaktseite nach unten einsetzen 1.
- Danach Akku nach unten in das Akkufach einlegen 2.



- Akkudeckel zuerst mit den seitlichen Nasen 3 an den Aussparungen der Innenseite des Gehäuses ausrichten.
- Danach Deckel zudrücken, bis er einrastet.



Falls Sie den **Akkudeckel wieder öffnen** müssen:

- Stecken Sie einen Fingernagel in die Aussparung unten am Akkudeckel 4 und ziehen Sie den Akkudeckel nach oben.

Akku laden

Der Akku wird teilgeladen mitgeliefert. Bitte laden Sie ihn vor der Benutzung vollständig auf.

- Stellen Sie das Mobilteil für **4 Stunden** in die Ladeschale.

Das Mobilteil schaltet sich automatisch ein, wenn Sie es in die Ladeschale stellen.

ℹ	◆ Das Mobilteil darf nur in die dazugehörige Ladeschale gestellt werden. ◆ Der Akku kann sich während des Aufladens erwärmen. Das ist ungefährlich. ◆ Die Ladekapazität des Akkus reduziert sich technisch bedingt nach einiger Zeit.

Grundeinstellungen mit dem Installationsassistenten

Sobald das Mobilteil eingeschaltet wird, startet der Installationsassistent. Wenn das Telefon noch nicht eingeschaltet ist: ▶ Lang auf die Auflegen-Taste drücken.

Der Installationsassistent führt Sie durch die wichtigsten Einstellungen für Ihr Telefon. Sie benötigen während der Installation folgende Informationen:

- Zugangsdaten zu Ihrem WLAN (Netzwerkname und Kennwort). Um Internetdienste an Ihrem Telefon zu nutzen, benötigen Sie einen Router mit WLAN-Funktion und Internetverbindung.
- Anmeldedaten für Ihr Google-Konto, wenn Sie bereits eines eingerichtet haben.

- Informationen zur Bedienung des Touchscreens (➔ S. 12).
- Informationen zur Eingabe von Text (➔ S. 13).

Ablauf der Installation

- ▶ Wenn Sie die eingestellte Sprache ändern wollen, tippen Sie auf die Sprachanzeige und wählen Sie die gewünschte Sprache aus der Liste.
- ▶ Tippen Sie dann auf **Starten**, um mit der Installation zu beginnen.
- ▶ Wenn Sie Einstellungen auf einer Seite abgeschlossen haben, tippen Sie auf **Weiter**.
- ▶ Tippen Sie auf **Zurück**, wenn Sie Ihre Angaben noch einmal überprüfen oder ändern wollen.

Folgende Einstellungen nehmen Sie mit dem Assistenten vor:

- **Datum und Uhrzeit**

  Sie können Datum und Uhrzeit automatisch aus dem Netz einstellen lassen. Sobald das Mobilteil eine Internetverbindung aufbauen kann, werden Datum und Uhrzeit automatisch eingestellt. Sollte keine Internetverbindung aufgebaut werden können, müssen Sie Datum, Uhrzeit und Zeitzone selbst einstellen.
- **Google-Konto**

  Sie benötigen ein Google-Konto, wenn Sie Google-Dienste, z. B. das Synchronisieren von Kontakten zwischen verschiedenen Anwendungen und Geräten nutzen wollen. Sie können das Telefon bei einem bestehenden Konto anmelden oder ein neues einrichten.
- **WLAN-Verbindung**

  Um die Verbindung mit einem Google-Konto herzustellen, muss über WLAN eine Internetverbindung aufgebaut werden. Dazu richten Sie jetzt die WLAN-Verbindung ein.
- **Weitere Google-Dienste**

  Sie können sich bei Google+™ anmelden sowie Einstellungen für Ihren Einkauf bei Google Play™, die Google-Lokalisierung und die Sicherung Ihres Telefons über Google vornehmen.
- **Namen für die Personalisierung von Apps**

  Für die Personalisierung einiger Apps, können Sie einen Namen eingeben. Wenn Sie bereits ein Google-Konto eingerichtet haben, wird der Name Ihres Google-Kontos eingesetzt.

- **Allgemeinen Teil der Installation abschließen**

  Das Android™-Symbol zeigt den erfolgreichen Abschluss der Installation an.

  ▶ Auf **Beenden** tippen, um die Einstellungen zu sichern.

- **Land, Landes- und Ortsvorwahl**

  Wenn Ihr Mobilteil bereits an einer Basis angemeldet ist, können Sie jetzt die Einstellungen für Ihr Land sowie die Länder- und Ortsvorwahl vornehmen. Die Auswahl des Landes ist Grundlage für die automatische Einstellung der Zeitzone und der Landesvorwahl. Landes- und Ortsvorwahl benötigt Ihr Telefon, um Rufnummern, die in Ihrem Telefon in unterschiedlichen Formaten gespeichert sein können, korrekt zu wählen und um länderspezifische Anwendungen zu laden.

Auf **Beenden** tippen, um den Assistenten zu schließen und die Einstellungen zu sichern.

Ihr Telefon ist jetzt einsatzbereit!

- Der Installationsassistent wird gestartet, wenn das Mobilteil zum ersten Mal eingeschaltet wird. Er wird außerdem gestartet, nachdem Sie das Mobilteil auf Werkseinstellungen zurückgesetzt haben. Solange er nicht abgeschlossen wurde, startet er nach jedem Einschalten.
- Im Menü **Einstellungen** können Sie die hier getroffenen Festlegungen ändern und weitere Einstellungen vornehmen.
- Wenn Sie Ihr Mobilteil zusammen mit der Basis Gigaset SL930A gekauft haben, ist es bereits angemeldet. Wenn nicht, müssen Sie das Mobilteil an der Basis anmelden.

  Danach nehmen Sie die Einstellungen für Land, Landes- und Ortsvorwahl über die App **Telefon** vor.:

  ▶ Startseite ▶ ▶ Kontextmenü ▶ **Einstellungen** ▶ **Land** bzw. ▶ **Ort (Vorwahl)**
- Wenn Sie kein Google-Konto eingerichtet haben, wurde keine WLAN-Verbindung hergestellt. Richten Sie in diesem Fall die WLAN-Verbindung jetzt ein.

Bedienungsanleitungen

Online: Informationen zu Ihrem Telefon finden Sie auch online auf dem Mobilteil. Sobald Ihr Telefon mit dem WLAN verbunden ist und eine Internetverbindung aufbauen kann, können Sie die Online-Hilfe auf dem Mobilteil nutzen.

▶ Öffnen Sie die Anwendungsseite und tippen Sie auf **Hilfe**.

Damit Sie die gewünschte Information schnell finden, stehen ein Inhaltsverzeichnis, ein Stichwortverzeichnis sowie eine Suchfunktion zur Verfügung. Mit ◀ ▶ blättern Sie durch die Hilfe-Seiten.

Auf der ersten Seite erhalten Sie ausführliche Informationen zu den Navigationsmöglichkeiten durch die Online-Hilfe.

Zum Ausdrucken: Die ausführliche Anleitung finden Sie als PDF-Datei unter www.gigaset.com/gigasetSL930A.

Telefon bedienen

Mobilteil ein-/ausschalten

Einschalten: ▸ Auf die Auflegen-Taste drücken. Das Gerät schaltet sich nach ein paar Sekunden ein.

Oder: ▸ Mobilteil in die Ladeschale stellen. Nach ca. 35 Sek. schaltet es sich ein.

Ausschalten: ▸ **Lang** auf die Auflegen-Taste drücken. ▸ **Ausschalten** ▸ **OK**.

Wenn eine Display-Sperre eingerichtet ist: ▸ Display entsperren (➔ S. 19).

Touchscreen bedienen

Die Bedienung des Telefons erfolgt vor allem über das Display. Im Display angezeigte Symbole, Listeneinträge, Schalter und Auswahlflächen sind sensitive Flächen. Durch Antippen oder Berühren dieser Flächen und Streichen über das Display können Sie Funktionen einstellen und starten, Rufnummern eingeben oder auswählen und zwischen den verschiedenen Seiten navigieren.

Verwenden Sie die folgenden Aktionen zur Bedienung des Touchscreens:

Tippen

▸ Auf ein Symbol in den Anwendungsseiten, einen Eintrag in einer Liste oder eine Option tippen, um die Funktion zu aktivieren oder den Listeneintrag auszuwählen.

Berühren und halten

▸ Ein Objekt länger als 2 Sek. berühren, um eine Aktion einzuleiten. Die Reaktionszeit können Sie beeinflussen.

Beispiel:

▸ Eine App in den Anwendungsseiten berühren und halten, um sie auf die Startseite zu kopieren (➔ S. 15).

Ziehen

▸ Ein Objekt berühren, halten und über das Display an eine andere Position ziehen.

Beispiel:

▸ App auf der Startseite berühren, halten und nach oben auf **Entfernen** ziehen, um Sie von der Startseite zu löschen.

Streichen

- Nach oben/unten bzw. nach rechts/links über das Display streichen, um durch Listen zu scrollen oder von Seite zu Seite zu blättern.



Während Sie scrollen/blättern, wird rechts/unten ein Scroll-Balken angezeigt. Er zeigt Größe und Position des sichtbaren Bereichs an.



Zoomen

Einige Apps ermöglichen das Vergrößern oder Verkleinern des Display-Ausschnitts, z. B. für die Anzeige von Bildern oder das Hineinzoomen in Karten.

- Display mit zwei Fingern berühren und zusammenziehen (verkleinern) oder auseinanderziehen (vergrößern).



Voraussetzung: Die App muss das Zoomen unterstützen. Informationen zum Zoomverhalten des Browsers.

Text eingeben

Bei Funktionen mit Texteingabe wird eine Tastatur eingeblendet.

Die Tastenbelegung ist abhängig von der eingestellten Sprache.

Beispiel

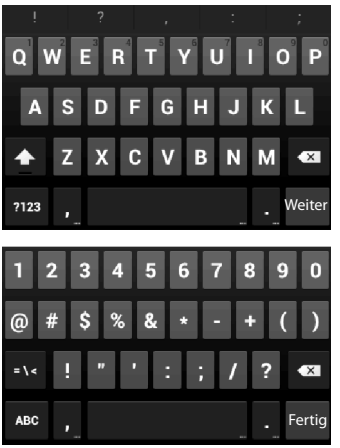

Text und Nummern eingeben

- Auf Tastensymbole tippen, um Buchstaben oder Ziffern einzugeben.

Tippen auf:

- (Shift): Zwischen Klein- und Großschreibung wechseln.
- **?123** / **ABC** : Zwischen der Eingabe von Ziffern und Sonderzeichen oder Buchstaben wechseln.
- **Beliebige Position:** Einfügemarke an diese Stelle positionieren.
- **Weiter**: In das nächste Eingabefeld springen.
- **Fertig**: Eingabe beenden.

Tastatur ausblenden

- Zurück-Taste drücken.

Falscheingaben korrigieren

- **Zeichen vor der Schreibmarke löschen:** ▸ **kurz** auf ⌫ tippen.
- **Gesamten Inhalt des Nummern- oder Textfeldes löschen:** ▸ **lang** auf ⌫ drücken.

Sonderbuchstaben eingeben



Sonderbuchstaben (diakritische Zeichen) sind sprachabhängige Varianten bestimmter Buchstaben, z. B. Umlaute.

- Ausgangsbuchstaben berühren und halten. Das gewünschte Zeichen aus der eingeblendeten Liste wählen.

Die Verfügbarkeit von Zeichen ist abhängig von der eingestellten Sprache und der Tastatureinstellung.

Text ausschneiden, kopieren und einfügen

Wort auswählen:



Wort berühren oder zweimal darauf tippen. Das Wort wird markiert.

Ein ganzes Textfeld auswählen:

- Wort berühren und halten oder zweimal darauf tippen. ▸ Auf ⊞ tippen. Der gesamte Text des Textfeldes wird markiert.

Markierten Text ausschneiden: ▸ Auf ✂ tippen.

Markierten Text kopieren: ▸ Auf ⧉ tippen.

Text aus Zwischenspeicher einfügen: ▸ Auf 📋 tippen. Oder: ▸ Stelle berühren und halten. ▸ Auf **Einfügen** tippen.

ℹ	Sie können das Verhalten des Telefons und der Tastatur bei der Eingabe von Text anpassen.

Startseiten

Die Startseiten sind Ausgangspunkt für alle Funktionen Ihres Telefons. Es gibt fünf Startseiten. Nach dem Einschalten wird die mittlere der fünf Seiten angezeigt.

Mit der Startseiten-Taste [⌂] öffnen Sie aus jeder beliebigen Anwendungssituation die zuletzt angezeigte Startseite.

Beispiel

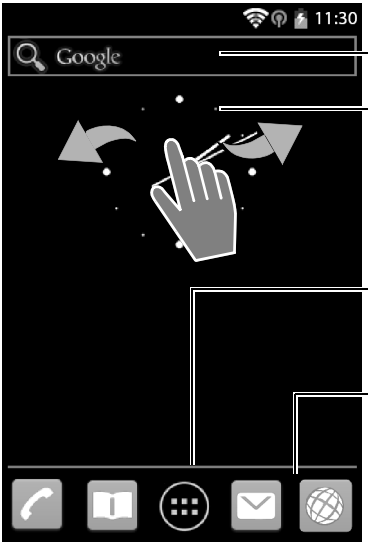

Google-Suchfunktion

Anwendungsbereich, konfigurierbar (→ S. 15)

Fünf Seiten, die Sie individuell gestalten können.

- Stellen Sie hier Funktionen zusammen, auf die Sie schnell zugreifen möchten.
- Horizontal über das Display streichen, um zwischen den Seiten zu wechseln.

Welche der fünf Seiten aktuell angezeigt wird, erkennen Sie beim Scrollen am orangen Balken, der kurz erscheint.

Optionenleiste

Häufig verwendete Funktionen (auf allen Startseiten gleich)

- In der Mitte: Menü mit allen auf Ihrem Telefon verfügbaren Apps und Widgets.
- Die weiteren Funktionen können Sie frei wählen, z. B. **Telefon**, **Kontakte**, **Browser**.

Startseiten individuell gestalten

Stellen Sie auf den Startseiten wichtige Apps und Rufnummern zusammen, die Sie mit einem „Touch" direkt aus dem Ruhezustand heraus starten bzw. anrufen wollen.

App auf Startseite kopieren

- Zu der Seite blättern, die Sie konfigurieren wollen.
- Anwendungsseite ▸ **APPS** oder **WIDGETS** wählen.
- Gewünschte App oder ein Widget berühren und halten. Das Objekt wird auf die Startseite kopiert. Sie können auf eine andere Startseite wechseln, indem Sie das Objekt an den rechten oder linken Seitenrand ziehen.
- Objekt auf der Startseite an die gewünschte Position ziehen.

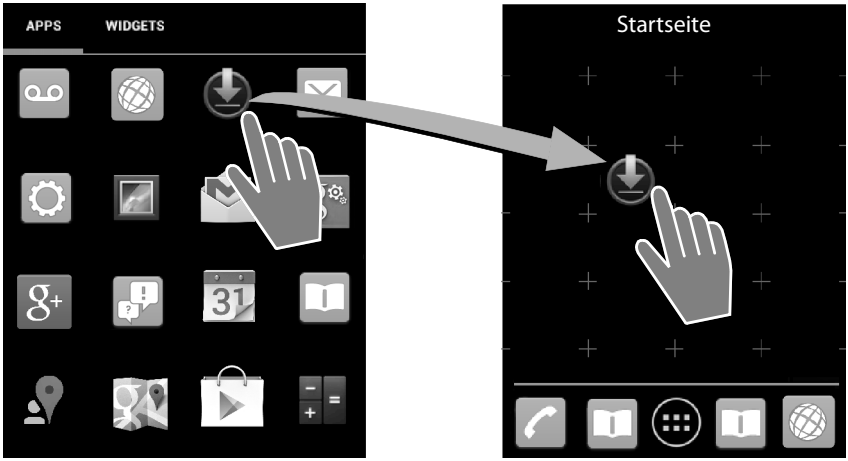

Direktwahl (Kurzwahl) auf Startseite einrichten

Register **WIDGETS** öffnen.

- Symbol **Direktwahl** berühren und halten. Die Kontaktliste wird geöffnet.
- Zum gewünschten Eintrag scrollen oder **Kontakte suchen**.
- Auf gewünschten Kontakt tippen. Gibt es mehrere Rufnummern, Rufnummer auswählen.



Die Direktwahl wird mit Namen des Kontakts und, wenn verfügbar, mit Bild auf der Startseite angelegt. Die zugehörige Rufnummer wird gewählt, wenn Sie auf das Symbol tippen.

App/Widget von Startseite entfernen



- Symbol auf der Startseite berühren, halten und nach oben auf **Entfernen** ziehen.

Apps/Widgets werden nur von der Startseite entfernt, auf den Anwendungsseiten bleiben sie erhalten. Wird eine Direktwahl gelöscht, bleibt der zugehörige Eintrag in der Kontaktliste unverändert. Die Einstellungen aller anderen Funktionen (z. B. Weckzeit) bleiben unverändert.

Hintergrund für Startseite festlegen

Als Hintergrund für die Startseite können Sie Bilder aus Ihrer Bildergalerie oder die vorinstallierten Hintergrundbilder oder Live-Hintergründe verwenden.

- Hintergrund der Startseite berühren und halten. ▶ **Galerie**, **Hintergrundbilder** oder **Live-Hintergründe**.
- Gewünschtes Motiv auswählen. ▶ **Hintergrund festlegen**.

Statusleiste und Statusseite

In der Statusleiste zeigen Symbole den Betriebszustand und die aktuellen Einstellungen des Telefons an.

Statusleiste

Symbol	Bedeutung
	Ladezustand des Akkus (außerhalb der Ladeschale)
	Akku wird geladen (aktueller Ladezustand)
	DECT-Empfangsstärke (Im Modus **Strahlungsfrei** aus); Weiß: **Maximale Reichweite** ein, Grün: **Maximale Reichweite** aus.
	DECT-Empfangsstärke (Im Modus **Strahlungsfrei** ein); Weiß: **Maximale Reichweite** ein, Grün: **Maximale Reichweite** aus,
	Rotes Kreuz: keine Verbindung zur Basis (unabhängig von **Strahlungsfrei**-Einstellung).
	WLAN-Empfangsstärke

Symbol	Bedeutung
	Laufendes Gespräch
	Entgangene Anrufe vorhanden
	Anrufbeantworter eingeschaltet
	Neue Nachricht(en) vorhanden
	Anrufbeantworter voll
	Neue E-Mail empfangen
	Über USB mit Computer verbunden
	Klingelton ausgeschaltet
	Wecker eingeschaltet
	Software-Update verfügbar
	Synchronisierung/Software-Update abgeschlossen

Weitere anwendungsspezifische Symbole können angezeigt werden.

Statusseite

Die Statusseite gibt detaillierte Informationen über den Status des Telefons und eingetretene Ereignisse, z. B. eingegangene Anrufe, neue Nachrichten, verfügbare Downloads oder andere Nachrichten von Apps.

Die Statusseite kann immer angezeigt werden, wenn die Statusleiste sichtbar ist.

- Statusleiste berühren und Statusseite nach unten aufziehen.

Beispiel

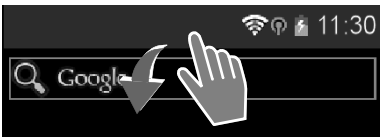

Auf Ereignis reagieren

- Auf einen Listeneintrag tippen, um die zugehörige App oder Einstellung zu öffnen.

  Beispiel: Tippen auf **Entgangene Anrufe** öffnet die Anrufliste.

Alle Ereignisse löschen

- Auf ✕ tippen, um alle Einträge auf der Statusseite zu löschen.

Einstellungen ändern

- Auf ⚙ tippen, um das Einstellungsmenü zu öffnen.

Statusseite schließen

- Taste ⬅ drücken oder den Kreis unten auf der Statusseite berühren und die Seite nach oben ziehen.

Wenn es für Ihr Telefon eine neue Firmware gibt, sehen Sie in der Statusleiste das Symbol . Öffnen Sie die Statusseite und tippen Sie auf den Eintrag **Neue Firmware erhältlich**. Folgen Sie den weiteren Anweisungen zur Installation.

Anwendungsseiten

Ihr Telefon stellt außer den Funktionen für die Telefonie viele weitere Anwendungen (Apps und Widgets) zur Verfügung. Sie werden in alphabetischer Reihenfolge angeordnet (nicht änderbar).

Apps sind die auf Ihrem Telefon verfügbaren Anwendungen.

Widgets sind Elemente, die speziell zur Anzeige auf einer Startseite gedacht sind, z. B. eine Uhr, ein Kalenderauszug für den aktuellen Tag, ein wichtiger Eintrag aus der Kontaktliste oder eine Direktwahl.

Anwendungsseiten öffnen

- ⌂ Startseite öffnen. Auf ⋯ tippen.
- Auf **APPS** oder **WIDGETS** tippen.

Die Listen der Apps und Widgets können mehrere Seiten umfassen.

- Nach rechts oder links über das Display streichen, um durch die Seiten zu blättern.

Beispiel

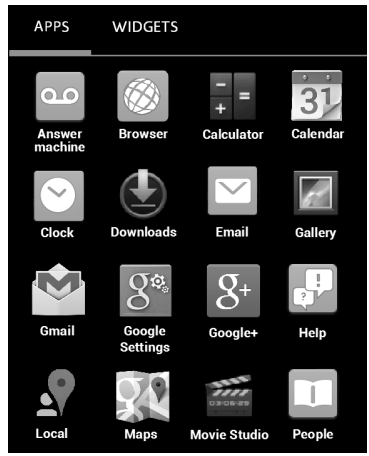

Weitere Apps und Widgets auf das Telefon laden

Ihr Telefon basiert auf der Android™-Plattform. Sie können die Funktionalität Ihres Telefons durch die Installation zusätzlicher Apps und Widgets erweitern.

Display ein-/ausschalten

Wenn Sie keine Taste drücken und das Display nicht berühren, wechselt das Display nach einiger Zeit **automatisch** in den Ruhezustand, d. h. es wird dunkel und es ist keine Eingabe mehr möglich. Auch die reguläre Funktion der Tasten wird deaktiviert. Die Zeitspanne, nach der das Display automatisch in den Ruhezustand wechselt, können Sie ändern.

Display manuell in Ruhezustand versetzen

▶ Auflegen-Taste **kurz** drücken.

Ruhezustand des Displays beenden

▶ Beliebige Taste drücken. Wenn eine Display-Sperre aktiviert ist, wird diese angezeigt.
  ▶ Display entsperren.

	Ein eingehender Anruf beendet den Ruhezustand des Displays automatisch. Sie können den Anruf annehmen. Nach Gesprächsende wird das Display wieder in den Ruhezustand versetzt.

Display entsperren

Sie können unterschiedliche Sicherheitsstufen für die Display-Sperre wählen:
Keine (Voreinstellung), **Finger bewegen**, **Muster**, **PIN**, **Passwort**.

Bei Einstellung „Finger bewegen“: ▶ Schloss-Symbol berühren und nach rechts ziehen.

Bei Einstellung „Muster“: ▶ Vier Punkte in der festgelegten Reihenfolge miteinander verbinden.



Bei Einstellung „PIN“ oder „Passwort“: ▶ PIN bzw. Passwort eingeben.

	Im Gesprächszustand wird das Display automatisch mit Hilfe eines Annäherungssensors gesperrt, wenn Sie das Mobilteil ans Ohr halten oder mit dem Finger bedecken. Diese Sperre wird wieder aufgehoben, sobald Sie das Mobilteil vom Ohr entfernen, bzw. den Finger wieder weg nehmen. Der Sensor befindet sich rechts neben der Hörkapsel (➔ S. 1).

Display drehen

Einige Apps, z. B. der Browser oder der Kalender, sind besser im Querformat zu bedienen. Dazu können Sie das Mobilteil drehen.

▶ Mobilteil drehen. Nach einigen Sekunden wird der Display-Inhalt im Querformat angezeigt.

Voraussetzung: Die Funktion **Display autom. drehen** muss aktiviert sein.

Telefonieren

Zum Telefonieren verwenden Sie die App **Telefon**.

Öffnen über die Startseite

▶ Startseite ▶ .

Öffnen aus den Anwendungsseiten

▶ Anwendungsseite ▶ **Telefon**.

Ggf. müssen Sie die Anwendungsseiten durchblättern. Die Apps sind alphabetisch sortiert.

Anrufen (Beispiel)

Anruf einleiten

- über die Wählseite
- aus der Anrufliste (enthält ausgehende, angenommene und entgangene Anrufe)
- aus der Kontaktliste
- intern (an der selben Basis angemeldete Mobilteile anrufen)

Anruf über Wählseite einleiten

- Rufnummer über das Tastenfeld eingeben. Wenn Sie auf eine Ziffer tippen, wird sie im Nummernfeld angezeigt.
- Auf tippen, um Eingabe zu löschen.
- Auf tippen, um eingegebene Rufnummer zu wählen.

Anruf annehmen



Sie haben folgende Möglichkeiten:

- Klingelsymbol berühren und nach **rechts** ziehen.
- Auf drücken.
- Falls **Automatische Rufannahme** eingeschaltet ist, Mobilteil aus Ladeschale nehmen.

Rufton ausschalten: ▶ Klingelsymbol berühren und nach **links** ziehen oder auf drücken.

Anruf auf Anrufbeantworter umleiten: ▶ Klingelsymbol berühren und nach oben ziehen.

Funktionen beim Telefonieren

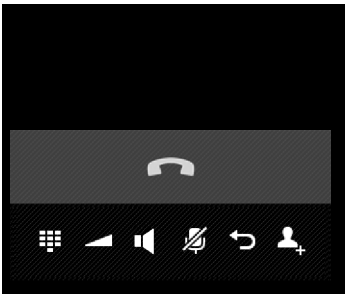

Gespräch beenden (oder Auflegen-Taste drücken).

Rufnummernerweiterung eingeben (zum Steuern von Hotline-Menüs oder für die Fernabfrage eines Anrufbeantworters).

Hörer- und Freisprechlautstärke ändern.

Lautsprecher ein-/ausschalten.

Mikrofon stumm schalten.

Rückruf einleiten.

Dreierkonferenz einleiten.

Freisprechen ein-/ausschalten: ▸ Abheben-Taste drücken.

Internet oder Telefon durchsuchen

Mithilfe der Google-Suche suchen Sie auf Ihrem Telefon oder im Internet nach beliebigen Informationen.

- Startseite [⌂] öffnen. ▸ Oben auf dem Startbildschirm das Google-Suchfeld berühren.

Oder:

- Anwendungsseite ▸ **Suche**.

Unter dem Suchfeld werden zunächst die Bereiche angezeigt, die durchsucht werden, oder die Ergebnisse aus früheren Suchläufen.

- Suchbegriff eingeben. Während der Eingabe werden unterhalb des Suchfelds Vorschläge aus der Internet-Suche und Suchergebnisse aus Ihrem Telefon (Apps und Kontakte) angezeigt.
- Auf einen Vorschlag tippen, um direkt danach zu suchen oder die App zu öffnen.
- Auf das Pfeil-Symbol rechts neben einem Eintrag tippen, um den Begriff zum Suchfeld hinzuzufügen, ohne eine Suche zu starten.

Kundenservice & Hilfe

Sie haben Fragen? Als Gigaset-Kunde profitieren Sie von unserem umfangreichen Service-Angebot.

Schnelle Hilfe erhalten Sie in der Online-Bedienungsanleitung und auf den Service-Seiten im Gigaset-Online-Portal unter www.gigaset.com/service

oder rufen Sie die verschiedenen Services durch Auswahl der folgenden Adressen auf:

Produktregistrierung:	www.gigaset.com/register
Fragen und Antworten (FAQ):	www.gigaset.com/faq/sl930a
Kompatibilität prüfen:	www.gigaset.com/compatibility
Mobilteil anmelden:	www.gigaset.com/registerhandset
Kontakt:	www.gigaset.com/support

Zulassung

Dieses Gerät ist für den analogen Telefonanschluss im Schweizer Netz vorgesehen.

Länderspezifische Besonderheiten sind berücksichtigt.

Hiermit erklärt die Gigaset Communications GmbH, dass dieses Gerät den grundlegenden Anforderungen und anderen relevanten Bestimmungen der Richtlinie 1999/5/EC entspricht.

Eine Kopie der Konformitätserklärung finden Sie über folgende Internetadresse: www.gigaset.com/docs

CE 0682

Garantieurkunde Schweiz

Dem Verbraucher (Kunden) wird unbeschadet seiner Mängelansprüche gegenüber dem Verkäufer eine Haltbarkeitsgarantie zu den nachstehenden Bedingungen eingeräumt:

- Neugeräte und deren Komponenten, die aufgrund von Fabrikations- und/oder Materialfehlern innerhalb von 24 Monaten ab Kauf einen Defekt aufweisen, werden von Gigaset Communications nach eigener Wahl gegen ein dem Stand der Technik entsprechendes Gerät kostenlos ausgetauscht oder repariert. Für Verschleissteile (z.B. Akkus, Tastaturen, Gehäuse, Gehäusekleinteile, Schutzhüllen – soweit im Lieferumfang enthalten) gilt diese Haltbarkeitsgarantie für sechs Monate ab Kauf.
- Diese Garantie gilt nicht, soweit der Defekt der Geräte auf unsachgemässer Behandlung und/oder Nichtbeachtung der Handbücher beruht.
- Diese Garantie erstreckt sich nicht auf vom Vertragshändler oder vom Kunden selbst erbrachte Leistungen (z.B. Installation, Konfiguration, Softwaredownloads). Handbücher und ggf. auf einem separaten Datenträger mitgelieferte Software sind ebenfalls von der Garantie ausgeschlossen.
- Als Garantienachweis gilt der Kaufbeleg mit Kaufdatum. Garantieansprüche sind innerhalb von zwei Monaten nach Kenntnis des Garantiefalles geltend zu machen.
- Ersetzte Geräte bzw. deren Komponenten, die im Rahmen des Austauschs an Gigaset Communications zurückgeliefert werden, gehen in das Eigentum von Gigaset Communications über.
- Diese Garantie gilt für in der Schweiz erworbene Neugeräte. Garantiegeberin ist die Gigaset Communications Schweiz GmbH, Bielstrasse 20, 4500 Solothurn, Switzerland.
- Weiter gehende oder andere Ansprüche aus dieser Herstellergarantie sind ausgeschlossen. Gigaset Communications haftet nicht für Betriebsunterbrechung, entgangenen Gewinn und den Verlust von Daten, zusätzlicher vom Kunden aufgespielter Software oder sonstiger Informationen. Die Sicherung derselben obliegt dem Kunden. Der Haftungsausschluss gilt nicht, soweit zwingend gehaftet wird, z.B. nach dem Produkthaftpflichtgesetz, in Fällen des Vorsatzes, der groben Fahrlässigkeit, wegen der Verletzung des Lebens, des Körpers oder der Gesundheit.
- Durch eine erbrachte Garantieleistung verlängert sich der Garantiezeitraum nicht.
- Soweit kein Garantiefall vorliegt, behält sich Gigaset Communications vor, dem Kunden den Austausch oder die Reparatur in Rechnung zu stellen. Gigaset Communications wird den Kunden hierüber vorab informieren.
- Gigaset Communications behält sich das Recht vor seine Servicearbeiten durch ein Subunternehmen ausführen zu lassen. Anschrift siehe www.gigaset.com/ch/service
- Eine Änderung der Beweislastregeln zum Nachteil des Kunden ist mit den vorstehenden Regelungen nicht verbunden.

Zur Einlösung dieser Garantie, wenden sie sich bitte an unsere Hotline Tel. 0848 212 000.

Haftungsausschluss

Das Display Ihres Mobilteils hat eine Auflösung von 480x320 Pixel (Bildpunkten), die mit Hilfe von 460.800 Ansteuerelementen erreicht wird. Jedes Pixel besteht aus drei Sub-Pixel (rot, grün, blau).

Es kann vorkommen, dass ein Pixel falsch angesteuert wird oder eine Farbabweichung aufweist. **Das ist normal und kein Grund für einen Garantiefall.**

Entnehmen Sie der folgenden Tabelle die Anzahl der Pixelfehler, die auftreten darf, ohne dass ein Garantiefall vorliegt.

Beschreibung	**max. Anzahl erlaubter Pixelfehler**
Farbig leuchtende Sub-Pixel	1
Dunkle Sub-Pixel	1
Gesamtzahl farbiger und dunkler Sub-Pixel	1

Gebrauchsspuren an Display und Gehäuse sind bei der Garantie ausgeschlossen.

Umwelt

Unser Umweltleitbild

Wir als Gigaset Communications GmbH tragen gesellschaftliche Verantwortung und engagieren uns für eine bessere Welt. Unsere Ideen, Technologien und unser Handeln dienen den Menschen, der Gesellschaft und der Umwelt. Ziel unserer weltweiten Tätigkeit ist die dauerhafte Sicherung der Lebensgrundlagen der Menschen. Wir bekennen uns zu einer Produktverantwortung, die den ganzen Lebensweg eines Produktes umfasst. Bereits bei der Produkt- und Prozessplanung werden die Umweltwirkungen der Produkte einschließlich Fertigung, Beschaffung, Vertrieb, Nutzung, Service und Entsorgung bewertet.

Informieren Sie sich auch im Internet unter www.gigaset.com über umweltfreundliche Produkte und Verfahren.

Umweltmanagementsystem

Gigaset Communications GmbH ist nach den internationalen Normen ISO 14001 und ISO 9001 zertifiziert.

ISO 14001 (Umwelt): zertifiziert seit September 2007 durch TÜV SÜD Management Service GmbH.

ISO 9001 (Qualität): zertifiziert seit 17.02.1994 durch TÜV Süd Management Service GmbH.

Entsorgung

Akkus gehören nicht in den Hausmüll. Beachten Sie hierzu die örtlichen Abfallbeseitigungsbestimmungen, die Sie bei Ihrer Gemeinde erfragen können.

Hinweis zur Entsorgung

Dieses Produkt darf am Ende seiner Lebensdauer nicht über den normalen Haushaltabfall entsorgt werden, sondern muss einer Verkaufsstelle oder an einem Sammelpunkt für das Recycling von elektrischen und elektronischen Geräten abgegeben werden gemäss Verordnung über die Rückgabe, Rücknahme und Entsorgung elektrischer und elektronischer Geräte (VREG).

Die Werkstoffe sind gemäss ihrer Kennzeichnung wiederverwertbar. Mit der Wiederverwendung, der stofflichen Verwertung oder anderen Formen der Verwertung von Altgeräten leisten Sie eine wichtigen Beitrag zum Schutze der Umwelt.

Anhang

Pflege

Wischen Sie das Gerät mit einem **feuchten** Tuch oder einem Antistatiktuch ab. Benutzen Sie keine Lösungsmittel und kein Mikrofasertuch.

Verwenden Sie **nie** ein trockenes Tuch: es besteht die Gefahr der statischen Aufladung.

In seltenen Fällen kann der Kontakt des Geräts mit chemischen Substanzen zu Veränderungen der Oberfläche führen. Aufgrund der Vielzahl am Markt verfügbarer Chemikalien konnten nicht alle Substanzen getestet werden.

Beeinträchtigungen von Hochglanzoberflächen können vorsichtig mit Display-Polituren von Mobiltelefonen beseitigt werden.

Kontakt mit Flüssigkeit ⚠

Falls das Gerät mit Flüssigkeit in Kontakt gekommen ist:

1. **Das Gerät von der Stromversorgung trennen.**
2. **Die Akkus entnehmen und das Akkufach offen lassen.**
3. Die Flüssigkeit aus dem Gerät abtropfen lassen.
4. Alle Teile trocken tupfen.
5. Das Gerät anschließend **mindestens 72 Stunden** mit geöffnetem Akkufach und mit der Tastatur nach unten (wenn vorhanden) an einem trockenen, warmen Ort lagern (**nicht:** Mikrowelle, Backofen o. Ä.).
6. **Das Gerät erst in trockenem Zustand wieder einschalten.**

Nach vollständigem Austrocknen ist in den meisten Fällen die Inbetriebnahme wieder möglich.

Open Source Software

Allgemeines

Ihr Gigaset-Gerät enthält unter anderem Open Source Software, die verschiedenen Lizenzbedingungen unterliegt. Die Einräumung von Nutzungsrechten im Bezug auf die Open Source Software, die über den Betrieb des Gerätes in der von der Gigaset Communications GmbH gelieferten Form hinausgehen, sind in den jeweiligen Lizenzbedingungen der Open Source Software geregelt.

Lizenz- und urheberrechtliche Hinweise

Ihr Gigaset-Gerät enthält Open Source Software, die der GNU General Public License (GPL) bzw. der GNU Lesser General Public License (LGPL) unterliegt. Die entsprechenden Lizenzbedingungen sind am Ende dieses Dokuments in ihrer Original-Fassung abgedruckt. Der entsprechende Quellcode kann unter www.gigaset.com/opensource aus dem Internet heruntergeladen werden. Innerhalb von drei Jahren nach Kauf des Produktes kann der entsprechende Quellcode auch von der Gigaset Communications GmbH angefordert werden. Bitte nutzen Sie hierzu die unter www.gigaset.com/service angegebenen Kontaktmöglichkeiten.

Ihr Gigaset-Gerät enthält Open Source Software, die verschiedenen Lizenzbedingungen unterliegt. Sie finden die Lizenzbedingungen auf Ihrem Telefon unter:

- Anwendungsseite ▸ **Einstellungen** ▸ **Über das Telefon** ▸ **Rechtliche Hinweise** ▸ **Open-Source-Lizenzen**

Index

A

Abheben-Taste 1
Akku
  einlegen 9
  laden 9
Anmeldemodus 2
Annäherungssensor 1, 19
Anruf
  annehmen 20, 21
  Auf Anrufbeantworter umleiten 20
  einleiten 20
  Klingelton ausschalten 20
Anwendungsmenü
    siehe Anwendungsseiten
Anwendungsseiten 18
App 18
  auf Startseite kopieren 15
  entfernen v. konfig. Seite 16
  spezifisches Menü öffnen 1
  zuletzt geöffnete anzeigen 1
Apps
  Hilfe 11
  Suche 22
  Telefon 20

B

Basis
  aufstellen 6
  mit Strom-/Telefonnetz verbinden 7
Bedienfunktionen des Touchscreens 12
Bedienungsanleitungen 11
Berühren eines Objekts 12

D

Diakritische Zeichen eingeben 14
Display
  ein-/ausschalten 19
Display-Sperre
  aufheben 19
  mit Muster 19
  mit PIN 19

E

Eigene Seite
  App/Funktion entfernen 16
  gestalten 15
Ende-Taste s. Tasten
Entsorgung 26

F

Falscheingaben korrigieren 14
Fehlerbehebung 23
Firmware-Update 18
Flüssigkeit 26
Fragen und Antworten 23
Freisprechen 21

G

Garantie 24
Gespräch
  beenden 21
GNU General Public License (GPL)
  English 31
GNU Lesser General Public License
    (LGPL), English 31
Google+™ 10
Google-Suche 22
GPL 27
Groß-/Kleinschreibung 13

H

Haftungsausschluss 25
Hilfe 23
Hilfe-App auf dem Mobilteil 11
Hörgeräte 4

I

In Betrieb nehmen, Mobilteil 8
Installationsassistent 10
  beenden 11
  starten 10

K

Klein-/Großschreibung 13
Klingelton ausschalten 20
Klinkenbuchse 2
Konfigurierbare Seite
  App/Funktion entfernen 16
Kontakt mit Flüssigkeit 26
Korrektur von Falscheingaben 14

L

Lade-Kontakte 2
Ladeschale (Mobilteil)
anschließen 8
aufstellen 6
Lautstärke ändern 21
License
GPL 31
LGPL 31

M

Medizinische Geräte 4
Menü-Taste 1
Micro-USB-Anschluss-Buchse 2
Mikrofon stumm schalten 21
Mobilteil
ein-/ausschalten 12
in Betrieb nehmen 8
Ladeschale anschließen 8
Muster, Display-Sperre 19

N

Nachrichten-LED 1, 2
Nachwählen von Nummern 21

O

Online-Hilfe 11
Open Source Software 27, 31

P

Paging 2
Paging-Taste 2
Pflege des Geräts 26
PIN, Display-Sperre 19

R

Reichweite 6, 7
Telefonbetrieb 6
WLAN 6
Rufnummernerweiterung 21

S

Schnellzugriff auf Funktionen/Apps 15
Scroll-Balken 13
SD-Karte einstecken 8
Sicherheitshinweise 4
Sonderbuchstaben eingeben 14
Sonderzeichen eingeben 13
Sprache einstellen 10
Startseite 15
gestalten 15
Startseiten-Taste 1
Statusleiste 1
Symbole 17
Statusseite 17
öffnen/schließen 17
Steckernetzgerät 4
Streichen 13
Stromkabel anschließen 7
Stromverbrauch 24
Suchen 22

T

Tastatur 13
Tasten 1
Abheben-Taste 1
Auflegen-/Ende-Taste 1
Paging-Taste (Basis) 2
Startseiten-Taste 1
Zurück-Taste 1
Technische Daten 24, 27
Technische Daten s.
ausführliche Anleitung (Internet) 11
Telefon
in Betrieb nehmen 6
Telefonieren 20
Anruf annehmen 20
Anrufen 20
Gespräch beenden 21
Telefonkabel anschließen 7
Tippen auf ein Objekt 12
Touchscreen, Bedienfunktionen 12

U

Umlaute eingeben 14
Umwelt 25
USB-Anschluss-Buchse 2

V

Verpackungsinhalt 6

W

Wählseite 20
Widget 18
Direktwahl 16

Z

Ziehen eines Objekts 12
Zoom 13
Zulassung 23
Zuletzt-Taste 1
Zurück-Taste 1

Alle Rechte vorbehalten. Änderungen vorbehalten.

Open Source Software

Licence texts

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright© 1989, 1991 Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.

b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose

any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright© <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

Gnomovision version 69, Copyright© year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright© 1991, 1999 Free Software Foundation, Inc. 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

a) The modified work must itself be a software library.

b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.

c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.

d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright© <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

Issued by
Gigaset Communications GmbH
Frankenstr. 2a, D-46395 Bocholt

© Gigaset Communications GmbH 2013
Subject to availability.
All rights reserved. Rights of modification reserved.
www.gigaset.com

Google, Google Play, Android and other marks are trademarks of Google Inc.